


Advantages

- Up to 50% increase in heat rejection
- 40-60% reduction in mass
- 20-40% reduction in volume
- Reduced pump and fan power
- New optimization schemes
- Reduced maintenance cost

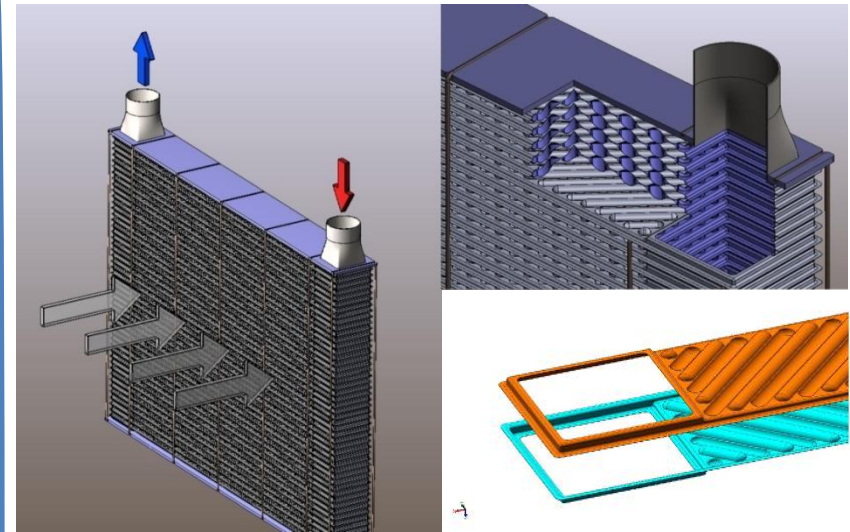

Other Design Options

- Cool multiple fluids in a single core
- Unique shapes

